



# OMEGA 27


### FEATURES

- # CB & 10m Mobile antennas
- # Tunable from 27 to 28.5 MHz
- # 17/7 PH tapered stainless steel whip
- # 180° adjustable whip
- # OMEGA 27 M6: bottom joint M6 female
- # Detachable for car-wash

### TECHNICAL DATA

Type: ..... base loaded  
 Impedance: ..... 50 Ω  
 Frequency range: ..... 27... 28.5 MHz  
 Polarization: ..... linear vertical  
 SWR @ res. freq.: ..... ≤ 1.2  
 Max. Power ..... 15 Watts (CW) continuous  
 ..... 150 Watts (CW) short time  
 Bandwidth @ SWR ≤ 2: ..... ≥ 1300 kHz (120 channel)  
 Height (approx.): .....  
 OMEGA 27 ..... 970 mm, 3.2 ft  
 OMEGA 27 radiator M6 ..... 945 mm, 3.1 ft  
 Weight (approx.): ..... 385 gr, 0.85 lb  
 Mount type: .....  
 OMEGA 27: ..... "N" mount, hole Ø12.5mm, 1/2 in  
 OMEGA 27 M6: ..... M6 thread joint  
 OMEGA 27 MAG: ..... PM-100 S or PM-125 S magnetic mount  
 Cable length / type: .....  
 OMEGA 27: ..... 4m, 13 ft / RG58  
 OMEGA 27 M6: ..... not supplied  
 OMEGA 27 MAG: ..... 3.6m, 11.8 ft / RG58

- P/N 2206306.02 OMEGA 27
- P/N 2206306.61 OMEGA 27 MAG (PM-100)
- P/N 2206306.64 OMEGA 27 MAG (PM-125)
- P/N 2406306.06 OMEGA 27 M6 (whip only)

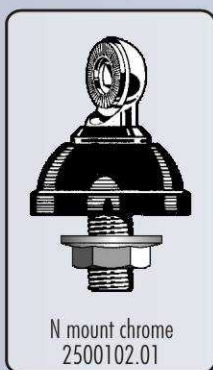

STANDARD  
MOUNT



OMEGA 27



OMEGA 27 M6  
(whip only)

Optional  
M6-male / M7-female  
Adaptor  
P/N 30.AD007.00/BLK



OMEGA 27 MAG

PM-125

PM-100